




11/23/98

**UTILITY
PATENT APPLICATION
TRANSMITTAL***(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Attorney Docket No.

35.13131

First Named Inventor or Application Identifier

TAKEYUKI NAGASHIMA

Express Mail Label No.

PTO
1515
09/19/98

11/23/98

APPLICATION ELEMENTS*See MPEP chapter 600 concerning utility patent application contents.***ADDRESS TO:**Assistant Commissioner for Patents
Box Patent Application
Washington, DC 202311. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)2. ☒ Specification *Total Pages* **33**3. ☒ Drawing(s) (35 USC 113) *Total Sheets* **6**4. ☒ Oath or Declaration *Total Pages* **1**a. ☐ Newly executed (original or copy)b. ☐ Unexecuted for information purposesc. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).5. ☐ Incorporation By Reference (useable if Box 4c is checked)
The entire disclosure of the prior application, from which a copy
of the oath or declaration is supplied under Box 4c, is considered
as being part of the disclosure of the accompanying application
and is hereby incorporated by reference therein.6. ☐ Microfiche Computer Program (Appendix)7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)a. ☐ Computer Readable Copyb. ☐ Paper Copy (identical to computer copy)c. ☐ Statement verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**8. ☐ Assignment Papers (cover sheet & document(s))9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)10. ☐ English Translation Document (if applicable)11. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations12. ☐ Preliminary Amendment13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)14. ☐ Small Entity ☐ Statement filed in prior
Statement(s) application
Status still proper and desired15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label05514
(Insert Customer No. or Attach bar code label here)or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	9-20 =	0	X \$ 18.00 =	\$0
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	3-3 =	0	X \$ 78.00 =	\$0
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$760.00
	Total of above Calculations =				\$760.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				0
	TOTAL =				\$760.00

19. Small entity status


- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 760.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	LEONARD P. DIANA, ESQ.
SIGNATURE	
DATE	November 20, 1998

PRINTER SERVER, METHOD FOR PROCESSING DATA,
AND STORAGE MEDIUM

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to a printer server
for processing the print information supplied from a
data processor through a predetermined communication
medium and transferring print data to a printer, a
10 method for processing the data in the printer server,
and a storage medium storing a program which can be
read by a computer.

Related Background Art

To correct the state change of a conventional
15 printer such as the change of an output image due to
the change of a condition such as temperature or
humidity, or the state change or deterioration state of
a visible image due to the deterioration of consumables
such as a drum and toner cartridge in the case of an
20 electrophotographic printer, calibration corresponding
to the state change is performed so that the printer
can output an image that meets requested density and
color by correcting the print information received so
as to be able to output the requested density and color
25 even if the state change occurs.

In the case of a printing system for converting
image data into binary notation with a client computer,

correction data is obtained through the calibration of
a printer by using the two-way-communication function
of the client computer to produce a correction table
and the image data is converted into binary notation by
correcting the image data.

In the case of a shared printing system in which
one printer is shared by a plurality of client
computers, the above correction is asynchronously
performed by the client computers.

To locally use a printer, it is possible to
realize correction corresponding to the color
reproducing characteristic of a printer by obtaining
correction data through calibration and correcting
image data as ever.

However, in the case of the shared printing system
in which one printer is used on a network and shared by
a plurality of client computers, the following problem
occurs.

In the case of the above system, a printing job
obtaining correction data is not always preferentially
printed. When the printing job from a certain client
computer is processed before the printing job of the
other client computer is processed by a printer and
lots of images are formed by the printer, the color
reproducibility of the printer may be greatly changed
due to the formation of the images.

That is, the correction data used for the

correction provided with the print information
corresponding to the printing job of a certain client
computer may not correspond to the color
reproducibility when the printing job is processed by a
5 printer.

Thus, in the case of the shared printing system in
which one printer is shared by a plurality of client
computers, there is a problem that the correction
corresponding to the color reproducibility when
10 printing is executed cannot be performed by a
conventional method.

Moreover, there is a problem that the application
release time is prevented from being reduced while the
processing and correction for producing a correction
15 table are performed by a client computer in accordance
with correction data.

SUMMARY OF THE INVENTION

The present invention is made to solve the above
20 problems and its object is to make it possible to
correct the image data supplied from a client computer
correspondingly to the color reproducing characteristic
of a printer and stably output high-quality data.

It is another object of the present invention to
25 efficiently control the correction data corresponding
to the color-reproducing characteristic of the printer
in a system constituted with a client computer, a
server computer, and an output device.

5 recording means for storing the correction data
corresponding to the output characteristic of the
output device; and

10 Objects other than the above objects and features of the present invention will become more apparent from the following detailed description of the embodiment of the present invention when taken in conjunction with the accompanying drawings.

15

20

25

25

25

data-processing procedure by the printing system using the embodiment in FIG. 1;

FIG. 5 is a flowchart showing an example of the data-processing procedure by the printing system using the embodiment in FIG. 1;

FIG. 6 is a flowchart showing an example of the data-processing procedure by the printing system using the embodiment in FIG. 1;

FIG. 7 is a flowchart showing an example of the data-processing procedure by the printing system using the embodiment in FIG. 1;

FIG. 8 is an illustration showing an example of the correction data corresponding to a certain recording agent; and

FIG. 9 is an illustration for explaining a memory map of a storage medium for storing various types of data-processing programs which can be read by a printing system to which a printer server of the present invention can be applied.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiments of the present invention are described below by referring to the accompanying drawings.

FIG. 1 is a block diagram for explaining the structure of a printing system to which the printer server of an embodiment of the present invention can be

applied. The printing system is constituted with a server computer (printer server) having the two-way function, a client computer, and a printer. In the case of the printing system using this embodiment, a printer server is set between a plurality of client computers on one hand and a printer on the other. Moreover, the printer server controls the printing job supplied from each client in uniformed or distributed manner, and calibration.

In FIG. 1, the printing system is constituted with a server computer 100, a client computer 200, a printer 300, and a communication line 400 for connecting them.

The server computer 100 is provided with a first data control unit 101, a first calibration control unit 102, a first memory 103, a first recording-medium reading unit 104, a first input/output data control unit 105, a first interface control unit 106, a first CPU 107 for controlling every operation of the server computer 100, and a system bus 108 for connecting them.

In this case, the first data control unit 101 has the function of a so-called language monitor connected with the printer in two-way manner to obtain correction data or a function equivalent to that of the monitor and moreover, has the so-called printer-server function for controlling a plurality of printing jobs. Moreover, the first data control unit 101 stores the print data received from the client computer 100 in a medium to be

read by the first memory 103 or first recording-medium reading unit 104 and controls the processing for transmitting the print data to the printer 300 in accordance with printing-job control.

5 Moreover, the first recording-medium reading unit 104 and a second recording-medium reading unit 204 to be described later can read programs and image data from a storage medium such as an FD (floppy disk), CD-ROM, ROM, or magnetic tape of a language monitor or a
10 printer driver.

 The client computer 200 is provided with a second data control unit 201, a second memory 203, a second recording-medium reading unit 204, a second
15 input/output data control unit 205, a second interface control unit 206, a display unit 207, an input device 208, a second CPU 209 for controlling every operation of the client computer 200, and a system bus 210 for connecting them.

 The display unit 207 is a display device such as a
20 CRT display or liquid-crystal display. The input device 208 is a pointing device such as a keyboard or mouse.

 In this case, the second data control unit 201 is a so-called printer driver. The printer driver is a
25 program for processing print data generated through an application in accordance with a printer between an operating system resident on the client computer 200

and the printer 300 and controls the printer 300 and
the program is stored in the second memory 203 or a
medium to be read by the second recording-medium
reading unit 204. The communication line 400 is a two-
5 way serial interface such as a normal LAN, IEEE1394, or
USB.

The printer 300 is provided with a controller 301,
a third memory 302 controlled by the controller 301 and
an engine unit 303.

10 The engine unit 303 particularly has a function
capable of properly communicating a calibration request
to the controller in addition to the normal engine-
processing function.

The controller 301 has a function for executing
15 the calibration processing when calibration is
requested by the engine unit, obtaining correction
data, storing the data in a third memory 302 in
addition to the normal controller-processing function.

Moreover, the engine unit 303 issues a calibration
20 request to the controller 301 when one of various state
parameters showing the states of the unit 303 reaches a
predetermined value. In the case of an
electrophotographic engine, the state parameters
include the operation frequency of a photosensitive
25 drum after replaced, the temperature and humidity in a
printer, and the temperature of a fixing unit for
melting toner in the printer.

Furthermore, in the case of an ink jet system for heating ink with a heater to cause film boiling and discharging the ink by the pressure, the temperature of the ink and the temperature of a heater for heating the ink serve as state parameters.

Furthermore, the engine unit 303 monitors these parameters with various sensors or counters.

Furthermore, the unit 303 has a density sensor for directly detecting the toner density on a drum.

Therefore, the unit 303 can also be used for calibration by directly detecting the density of an image.

[Structure of printer]

An example of the structure of the electrophotographic printer 300 is described below.

The print data received from a server computer is image-processed by the controller 301 and input to the engine unit 303 in which image formation processing is performed.

The controller 301 performs the processing for developing the print data shown by PDL (Page Description Language) already corrected into luster image data.

The engine unit 303 forms an electrostatic latent image by scanning a photosensitive drum with a laser beam modulated in accordance with the luster image data for each developed color (C, M, Y, or K) by a polygon

mirror.

Then, the unit 303 obtains a visible image by
toner-developing the electrostatic latent image and
multiple-transfers the visible image to an intermediate
5 transfer body on all colors to form a colored visible
image. Moreover, the unit 303 transfers the colored
visible image to a transfer material to fix the colored
visible image on the transfer material. An image
formation unit for performing the above control is
10 constituted with a drum unit having a photosensitive
drum, a primary electrification unit having a contact
electrification roller, a cleaning unit, a development
unit, an intermediate transfer body, a form-feed unit
including a form cassette and various rollers, a
15 transfer unit including a transfer roller, and a fixing
unit.

In this case, the drum unit is constituted by
integrating a photosensitive drum (photosensitive body)
with a cleaner vessel having a cleaning function and
20 also serving as the holder of the photosensitive drum.
The drum unit is removably supported to the printer
body and constituted so that the unit can be easily
replaced in accordance with the service life of the
photosensitive drum. The photosensitive drum is
25 constituted by applying an organic photoconductor layer
on the outer periphery of an aluminum cylinder and
rotatably supported to the cleaner vessel. The

photosensitive drum is rotated by the driving force transferred from a driving motor and the driving motor rotates the photosensitive drum counterclockwise in accordance with the image forming operation. The
5 photosensitive drum is constituted so that an electrostatic latent image is formed by selectively exposing the surface of the photosensitive drum with a laser beam supplied from a scanner unit. In the case of the scanner unit, a modulated laser beam is
10 reflected by a polygon mirror rotated by a motor synchronously with a horizontal-synchronizing signal for an image signal to irradiate the photosensitive drum through a lens and a reflector.

The development unit has three color development
15 counters for performing development of yellow (Y), magenta (M), and cyan (C) and a black development counter for performing the development of black (K) in order to change the electrostatic latent image to a visible image. The color development counter and the
20 black development counter are respectively provided with sleeves and a coating blade pressure-welded to the outer periphery of each sleeve. Moreover, three color development counters are respectively provided with a coating roller.

25 Furthermore, the black development counter is removably set to the printer body and each color development is removably set to a development rotary

about a rotation axis.

5 The sleeves of the black development counter are respectively arranged with a very small interval of, for example, approximately 300 μm separate from the photosensitive drum. The black development counter carries toner with a feed member built in the counter and supplies electric charges to toner through frictional electrification so as to apply toner to the outer periphery of each sleeve rotating clockwise with a coating blade. Moreover, by applying a bias to the sleeves, the photosensitive drum is developed correspondingly to an electrostatic latent image to form a visible image of black toner on the photosensitive drum.

10 15 Three color development counters rotate in accordance with the rotation of the development rotary to form an image and a predetermined sleeve faces the photosensitive drum at a very small interval of approximately 300 μm from the photosensitive drum. Thereby, a predetermined color development counter stops at a development position facing the photosensitive drum and a visible image is formed on the photosensitive drum.

25 To form a color image, the development rotary rotates for each turn of the intermediate transfer body and the development process is executed in order of yellow development counter, magenta development counter, cyan development counter, and black

development counter, the intermediate transfer body rotates four turns to successively form visible images of yellow, magenta, cyan, and black toners, resulting in full colored visible images on the intermediate transfer body.

The intermediate transfer body is constituted so as to rotate in accordance with the rotation of the photosensitive drum by contacting the photosensitive drum, which rotates clockwise when a color image is formed and receives the multiple transfer of four-turn visible image from the photosensitive drum. Moreover, the intermediate transfer body simultaneously multiple-transfers a colored visible image on the intermediate transfer material to a transfer material because a transfer roller to be described later contacts the intermediate transfer body when the image is formed to hold and carry the transfer body. A TOP sensor and an RS sensor for detecting a position related to the rotational direction of the intermediate transfer body and a density sensor for detecting the density of a toner image transferred to the intermediate transfer body are arranged on the outer periphery of the intermediate transfer body. The transfer roller separates downward so as not to disturb a colored visible image while multiple-transferring the colored visible image onto the intermediate transfer body. Moreover, after four colored visible images are formed

on the intermediate transfer body, the transfer roller is moved upward with a cam member in accordance with the timing for transferring the colored visible images to the transfer material. Thereby, the transfer roller is pressure-welded to the intermediate transfer body at a predetermined pressure through the transfer material, a bias voltage is applied, and the colored visible images on the intermediate transfer body are transferred to the transfer material. The fixing unit fixes the transferred colored visible images while carrying the transfer material, which is provided with a fixing roller for heating the transfer material and a pressure roller for pressure-welding the transfer material to the fixing roller. The fixing roller and the pressure roller are formed into hollow bodies and a heater is built in the rollers. That is, the transfer material holding colored visible images are carried by the fixing roller and the pressure roller and toner is fixed to the surface of the rollers by adding heat and pressure. The transfer material in which the visible images are fixed is thereafter ejected to a paper ejection unit by a paper ejection roller and the image forming operation is completed.

Cleaning means cleans the toner left on the photosensitive drum and the intermediate transfer body and the waste toner after transferring a visible image of toner formed on the photosensitive drum to the

intermediate transfer body or the waste toner after transferring the four colored visible images formed on the intermediate transfer body to the transfer material is stored in the cleaner vessel.

5 FIGS. 2 to 7 are flowcharts showing an example of the data-processing procedure by a printing system using an embodiment, FIGS. 2 and 4 correspond to the data correction control procedure by the first calibration control unit 102, and FIG. 3 corresponds to
10 the data correction control procedure by the second control unit 201. Numbers (1), (2), (11) to (13), (21), and (22) respectively show each step.

Moreover, FIG. 5 is a flowchart showing the detailed procedure of the first calibration shown in
15 FIG. 2 and numbers (31) to (34) respectively show each step.

The first calibration includes the printer correction data requesting step (31), printer correction data presence deciding step (32), printer
20 control correction data obtaining step (33), and server control correction data storing step (34).

Moreover, FIG. 6 corresponds to the detailed procedure in the processing step (13) at the client side shown in FIG. 3, which includes the before-
25 correction print data transfer accessing step (41).

Furthermore, FIG. 7 corresponds to the detailed procedure at the server computer side shown in FIG. 4,

which includes the before-correction print data
receiving step (51), correction-data-obtaining memory
accessing step (52), server control correction data
presence deciding step (53), server control correction
5 data obtaining step (54), correction table production
deciding step (55), correction table production
deciding step (56), and calibration executing step
(57).

The data correcting operation by this embodiment
10 constituted as described above is described below by
referring to FIGS. 2 to 7.

The processing for the server computer 100 to
obtain correction data in accordance with the control
by the first calibration control unit 102 is described
15 below by referring to FIGS. 2 and 5.

It is decided whether the present is the timing
for obtaining correction data (1) and the decision
results in "YES". Thereby, the first calibration at
the server side (shown in FIG. 5) is executed (2).

20 The timing for obtaining correction data can be
executed asynchronously or synchronously with the
second data control unit 201 of a client computer.

For example, for the timing to be executed
asynchronously with the unit 201, there is a method of
25 using a certain elapsed time as the obtaining timing by
using a system clock or the like. In this case, it is
possible to improve the accuracy by shortening an

elapsed time to be set. Moreover, for the timing to be executed synchronously with the unit 201, there is a method of using the time when print data is transmitted from a client computer as the obtaining timing.

5 The first calibration control unit 102 requests correction data for the controller 301 of the printer 300 {step (31)} to decide whether correction data is present in the third memory 302 {step (32)}. Step (32) compares, for example, the calibration execution date
10 which is the additional information for the correction date previously stored in the first memory 103 with the calibration execution date which is the additional information for the correction data stored in the third memory 302 to decide whether the correction data stored
15 in the first memory 103 is the latest correction data. Then, when the correction data is the latest data, step (32) completes the first calibration of a server. Thus, by completing the first calibration in accordance with the decision result by step (32), it is possible
20 to prevent steps (33) and (34) from being unnecessarily executed and improve the processing efficiency.

 Correction data is the data generated through the calibration performed by the engine unit 303, which is the data for correcting the change of color
25 reproducibilities of the engine unit 303 produced due to change with time or environmental change.

 Calibration is started when the engine unit 303 of

the printer 300 issues a calibration request to the controller 301 and the controller 301 returns a calibration execution command to the engine unit 303 correspondingly to the request and executed in accordance with the control by the controller 301.

As disclosed in Japanese Patent Application Laid-open No. 7-92385 applied by the present applicant, calibration is constituted with two types of processing such as Dmax control for controlling the process of the engine unit 303 and the processing for obtaining correction data by measuring the gradation batch generated by an engine for which the Dmax control is performed every recording agent.

Correction data is the data generated for each recording agent and the data showing the relation between input density and actually-formed output density. Correction data is described below by referring to FIG. 8.

FIG. 8 is an illustration showing an example of correction data corresponding to a certain recording agent, in which y-axis shows output density obtained by measuring generated gradation batch and x-axis shows input density input to an engine unit in order to generate gradation batch.

In the case of the color reproducing characteristic of the engine unit 303, it is ideally preferable that input density and output density are

matched as shown by the broken line. However, when the above-mentioned state parameter reaches a threshold, the color reproducing characteristic of the engine unit 303 is deviated from the ideal line as shown by the continuous line. Therefore, the color reproducing

characteristic shown by the continuous line deviated from the ideal line is recorded by correction data. For example, the information showing a calibration date is added to output densities O1 to O5 to predetermined input densities I1 to I5 as correction data and used.

When it is decided in step (32) shown in FIG. 5 that correction data is present, correction data is obtained from the third memory 302 through communication between the controller 301 and the first calibration control unit 102 of the first data control unit 101 {step (33)}. Then, the obtained correction data is stored in the first memory 103 of the server computer 100 {step (34)}.

Printing performed in accordance with a printing job is described below by referring to FIGS. 3, 4, and 6.

In FIG. 3, when the input operation for executing printing is performed for an application or printer driver by an operator through the input device 208 and display unit 207 in the client computer 200 {step (11)}, the following processing is performed asynchronously with the processing in the server

computer 100.

Normal first image processing is applied to print data (12). Moreover, the first image processing converts RGB (8 bits) data into CMYK (8 bits) data when processing, for example, print data as color data with the print data control unit 201.

As the first image processing, for example, color matching using an input device on which print data depends and the printer 300 as an output device, brightness-density conversion for converting the RGB data to which the color matching is applied into the CMYK data, and masking UCR processing are performed.

Moreover, as shown in FIG. 6, the print data before correction to which conversion into the CMYK (8 bits) data is applied is transferred to the server computer 200 {step (41)}.

For the above step (41), the processing shown in FIG. 4 is performed in the server computer 200. The processing shown in FIG. 7 is performed as the second calibration {step (21)}.

First, the print data before correction is received {step (51)}. Then, the first memory 103 in which correction data is stored in step (2) in FIG. 2 is accessed {step (52)}, it is decided whether the correction data for performing calibration is present {step (53)}, and the decision results in "YES". Then, correction data is read out of the storage region of

the first memory 103 {step (54)} and a correction table is produced {step (55)}.

In this case, the correction table is a table for correcting the relation between input and output densities before correction shown by the continuous line to the ideal relation shown by the broken line in the case of the example shown in FIG. 8.

In step (55), a correction curve is generated by estimating the curve shown by the continuous line in FIG. 8 showing the color reproducing characteristic of a changed engine unit in accordance with the stored correction data and converting the curve so that the curve becomes line-symmetric to the ideal line shown by the broken line. One-dimensional LUT is generated in accordance with the correction curve. Then, the one-dimensional LUT generation is performed for each recording agent.

Then, it is decided whether a correction table is produced in step (55) (56). The decision results in "YES" and the CMYK (8 bits) data received by using the produced correction table is corrected {step (57)}.

Then, the second image processing is applied to print data {step (22)}. Moreover, the second image processing includes the binary-notation processing and output processing to be performed for the corrected CMYK (8 bits) data.

Moreover, it is needless to say that the first

calibration control unit 102 of the server computer 100 shown in FIG. 1 can apply proper correction then requested by a printer to print data by not correcting the print data before correction received from the client computer 200 in reentrant manner or by obtaining the correction data from a printer after processing a printing job at the timing for obtaining the correction data from the printer.

The above procedure makes it possible to form a high-quality output image in the server computer 100 having a two-way function for the calibration request from the printer 300. That is, it is possible to form and output a high-quality image independently of the state of the printer 300.

Moreover, according to this embodiment, it is unnecessary to control calibration data with each client computer because the calibration data of a printer is controlled with a server computer.

Therefore, it is possible to efficiently control the calibration data in a network in which the same printer can be used by a plurality of clients.

[Modification]

In the case of the above embodiment, the output densities 01 to 05 to the predetermined input densities I1 to I5 shown in FIG. 8 are stored in the third memory 302 as correction data.

A modification previously obtains the relation

between input and output densities for the change of each state parameter through experiments and stores the relation in the third memory 302.

For example, by making fixing temperature
5 correspond to temperature T, the relation between input and output densities is obtained. Then, in the case of calibration, a controller requests the value of each state parameter for an engine unit in accordance with a calibration request, synthesizes the relation between
10 input and output densities corresponding to each obtained state-parameter value, and obtains the correction data at the present point of time.

This modification makes it possible to shorten the time required for calibration because it is unnecessary
15 to form gradation batch because correction data is generated.

Moreover, in the case of the above embodiment, RGB data is converted into CMYK data through the first image processing {step (12)} by a client computer and
20 calibration {step (57)} is applied to each color by a server computer by using one-dimensional LUT corresponding to the color reproducing characteristic of an engine unit. Moreover, as a modification, it is possible to add conversion data used for the first
25 image processing to image data and transmit the data to a server computer so that the server computer synthesizes the added conversion data and

one-dimensional LUT to produce one conversion data value (such as RGB-to-CMYK multi-dimensional LUT) to correct the image data. This modification makes it possible to perform the first image processing {step
5 (12)} and the calibration {step (57)} at the same time. Therefore, it is possible to efficiently constitute a system.

Moreover, in the case of the above embodiment,
only one printer can be connected to a server computer
10 as shown in FIG. 1. However, it is also possible to form a structure in which a plurality of printers can be connected to one server computer. In this case, it is necessary to provide a first control unit
15 corresponding to each model name for a server and control calibration data for each unit.

Furthermore, it is possible to automatically transmit the correction-data obtaining timing from a printer to a server computer at the timing when calibration of the printer is completed. Thus, it is
20 possible for the server computer to always prepare the latest calibration data by communicating with the printer only when the power supply is turned on.

Furthermore, for the above embodiment, a printing system is described as an example in which the printer
25 300 is directly connected to the network shown in FIG. 1 and the server computer 100 is operated as the computer for controlling a printing job for the printer 300. However, it is also possible to apply the printer

300 to various computer systems by locally connecting
with a certain client computer (practically, the client
computer serves as a server computer) instead of
directly connecting with a network or locally
5 connecting with a certain server computer instead of
directly connecting with a network.

Furthermore, it is possible to apply the printer
300 to a printing system (system for processing the
entire print data with a server computer) for executing
10 the first image processing shown in FIG. 3 before step
(21) shown in FIG. 4.

Furthermore, it is possible to store the steps
shown in FIGS. 2 to 7 in a storage medium such as an FD
(floppy disk), CD-ROM, ROM, or magnetic tape and in the
15 recording-medium reading units of the server computer
100 and client computer 200.

Furthermore, it is possible to apply the present
invention to a system constituted with a plurality of
units or an apparatus constituted with one unit.
20 Furthermore, it is needless to say that the present
invention can be applied to a case in which the present
invention is executed by supplying a program to a
system or an apparatus.

In this case, a storage medium storing a program
25 related to the present invention constitutes the
present invention. Moreover, by reading the program
from the storage medium into a system or apparatus, the

system or apparatus is operated in accordance with a predetermined method.

Furthermore, the correction table described for this embodiment, specifically described in step (55) shown in FIG. 7 can be produced by the controller 301 of the printer 300 and stored in the third memory 302.

In this case, the first calibration control unit 102 of the server computer 100 does not obtain correction data but a correction table from the printer 300 and controls the table. Moreover, the data {step (54)} obtained by the client computer 200 is not correction data but a correction table.

The structure of a data-processing program which can be read by a printing system to which a printer server of the present invention can be applied is described below by referring to the memory map shown in FIG. 9.

FIG. 9 is an illustration for explaining the memory map of a storage medium for storing various data-processing programs which can be read by a printing system to which a printer server of the present invention can be applied.

Though not illustrated, the information for controlling program groups stored in a storage medium such as version information or a producer is also stored and moreover, the information depending on the OS at the program reading side such as an icon for

identifying and displaying a program may be stored.

Moreover, the data subordinate to various programs is also controlled in accordance with the above directory. Furthermore, a program for installing
5 various programs in a computer or a program for decompressing a program to be installed when it is compressed may be stored.

The functions of this embodiment shown in FIGS. 2 to 7 can be executed by a host computer in accordance with an externally-installed program. Moreover, the
10 present invention can be applied to a case in which an information group including a program is supplied to an output device from a storage medium such as a CD-ROM, flash memory, or FD or from an external storage medium
15 through a network.

As described above, it is needless to say that the object of the present invention can also be achieved by supplying a storage medium storing the program code of the software for realizing the functions of the above
20 embodiment to a system or an apparatus and reading the program code stored in the storage medium by the system or apparatus (or CPU or MPU).

In this case, the program code read out of the storage medium realizes the novel function of the
25 present invention and the storage medium storing the program code constitutes the present invention.

A storage medium for supplying a program code can

use a floppy disk, hard disk, optical disk, optical-magnetic disk, CD-ROM, CD-R, magnetic tape, nonvolatile memory card, ROM, or EEPROM.

Moreover, it is needless to say that, by executing
5 a program code read by a computer, cases are included
in which not only the functions of the above embodiment
are realized but also the OS (Operating System) working
on the computer or the like performs a part or the
whole of actual processing in accordance with the
10 designation of the program code, and the functions of
the above embodiment are realized by the processing.

Furthermore, it is needless to say that a case is
included in which a program code read out of a storage
medium is written in a memory provided for a function
15 extension board inserted into a computer or a function
extension unit connected to the computer and
thereafter, the CPU or the like provided for the
function extension board or function extension unit
performs a part or the whole of actual processing in
20 accordance with the designation by the program code,
and the functions of the above embodiment are realized
by the processing.

Many widely different embodiments of the present
invention may be constructed without departing from the
25 spirit and scope of the present invention. It should
be understood that the present invention is not limited
to the specific embodiments described in the

[illegible]

WHAT IS CLAIMED IS:

1. A printer server for receiving a printing job from a terminal and transferring the job to an output device, comprising:

5 recording means for storing the correction data corresponding to the output characteristic of said output device; and

correction means for correcting said printing job on the basis of said correction data.

10

2. The printer server according to claim 1, wherein said correction data is updated by performing two-way communication with said output device.

15

3. The printer server according to claim 2, wherein said correction data is generated when said output device executes calibration on the basis of a state parameter.

20

4. A printer-server data processing method for receiving a printing job from a terminal and transferring said printing job to an output device, comprising the step of:

25 correcting said printing job on the basis of the correction data corresponding to the output characteristic of said output device to be stored.

5. The printer-server data processing method according to claim 4, wherein said correction data is updated by performing two-way communication with said output device.

5

6. The printer-server data processing method according to claim 5, wherein said correction data is generated when said output device executes calibration on the basis of a state parameter.

10

7. A storage medium storing a program which can be read by a computer for controlling a printer server for receiving a printing job from a terminal and outputting the printing job to an output device, comprising the step of:

15

correcting said printing job on the basis of the correction data corresponding to the output characteristic of said output device to be stored.

20

8. The storage medium storing a program that can be read by a computer according to claim 7, wherein said correction data is updated by performing two-way communication with said output device.

25

9. The storage medium storing a program that can be read by a computer according to claim 7, wherein said correction data is generated when said output

device executes calibration on the basis of a state parameter.

SECRET

FIG. 1

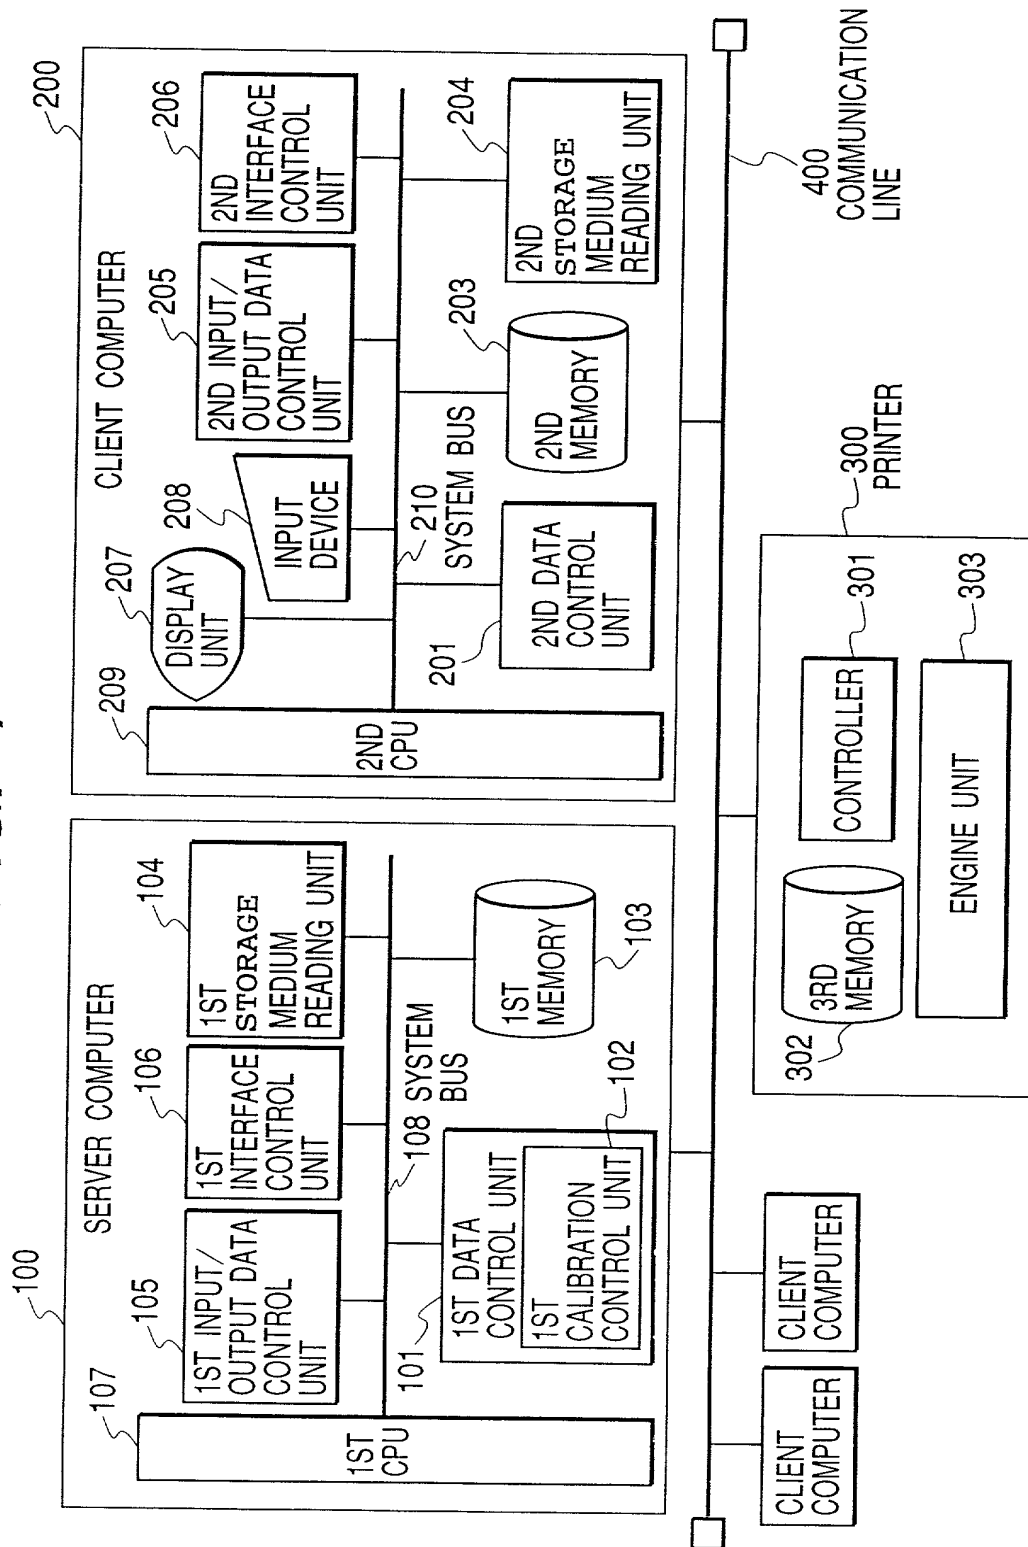


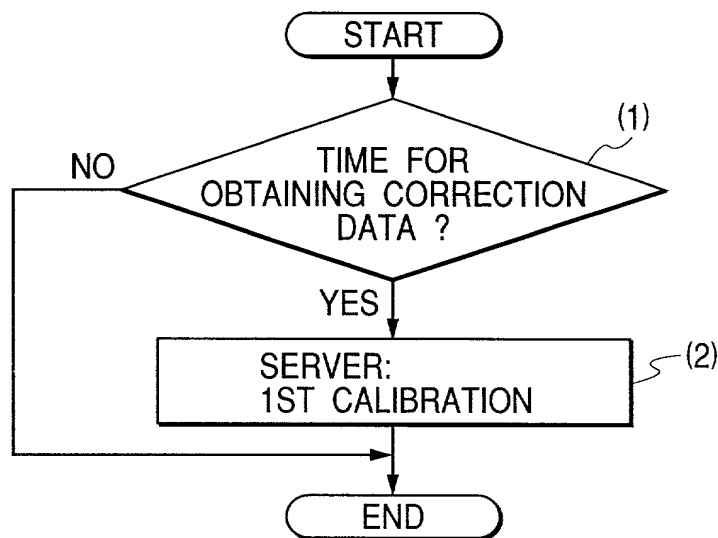
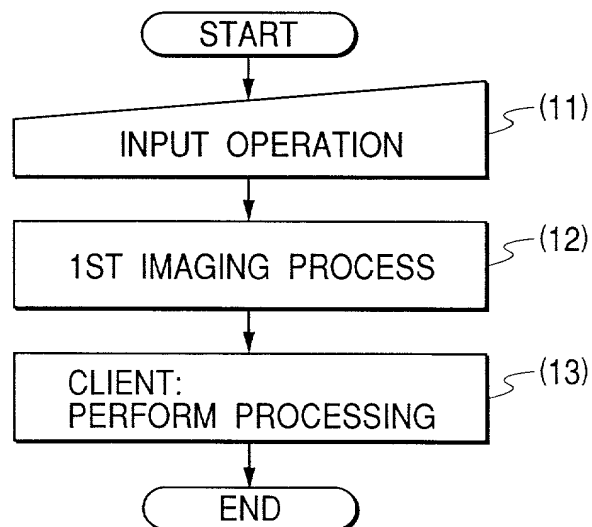
FIG. 2*FIG. 3*

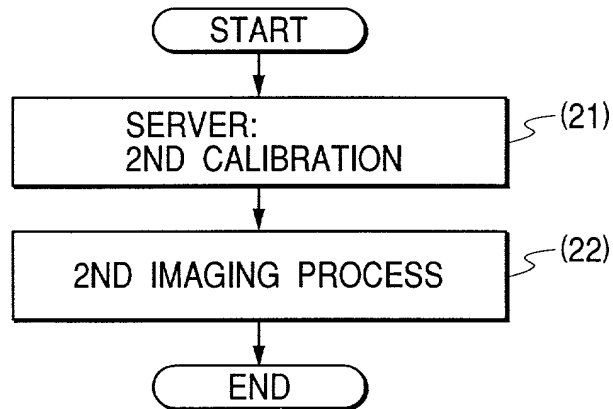
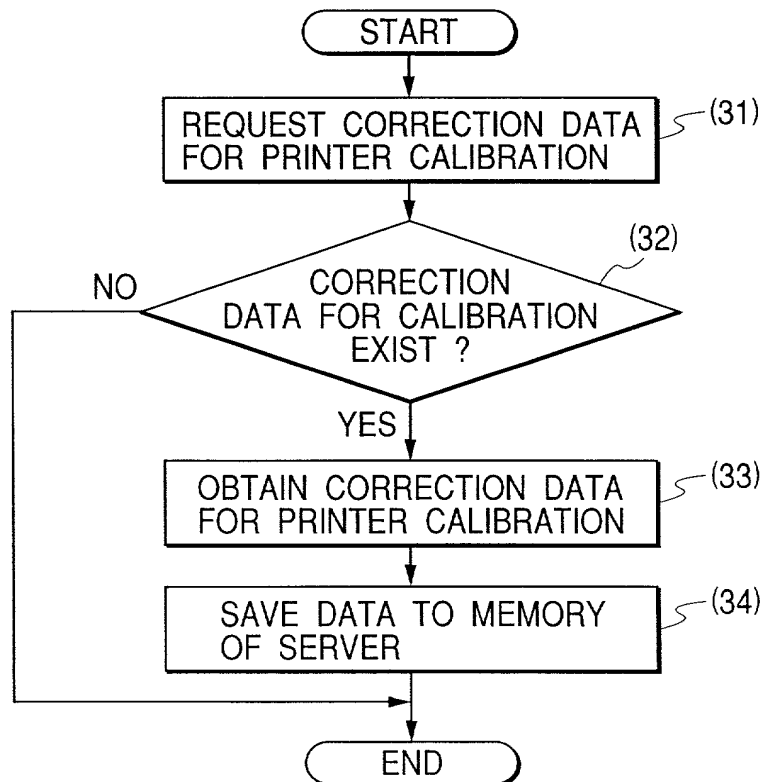
FIG. 4*FIG. 5*

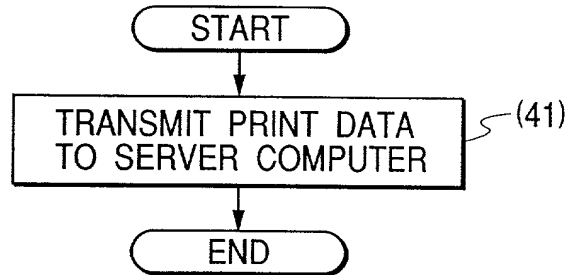
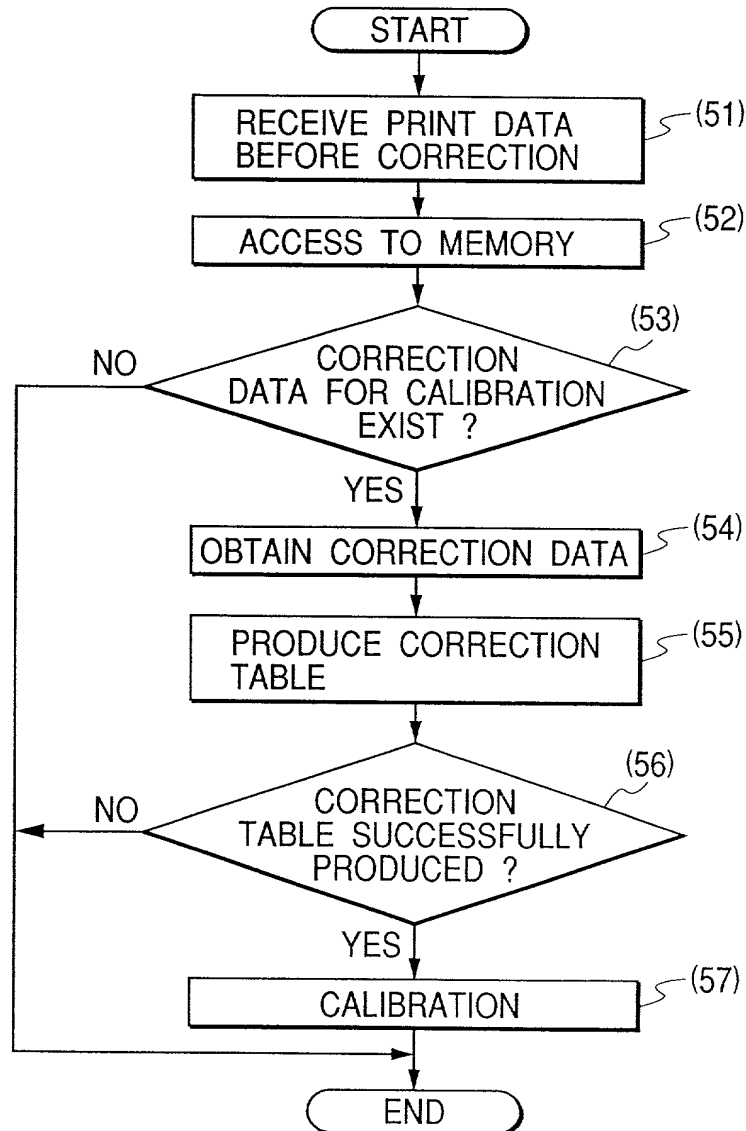
FIG. 6**FIG. 7**

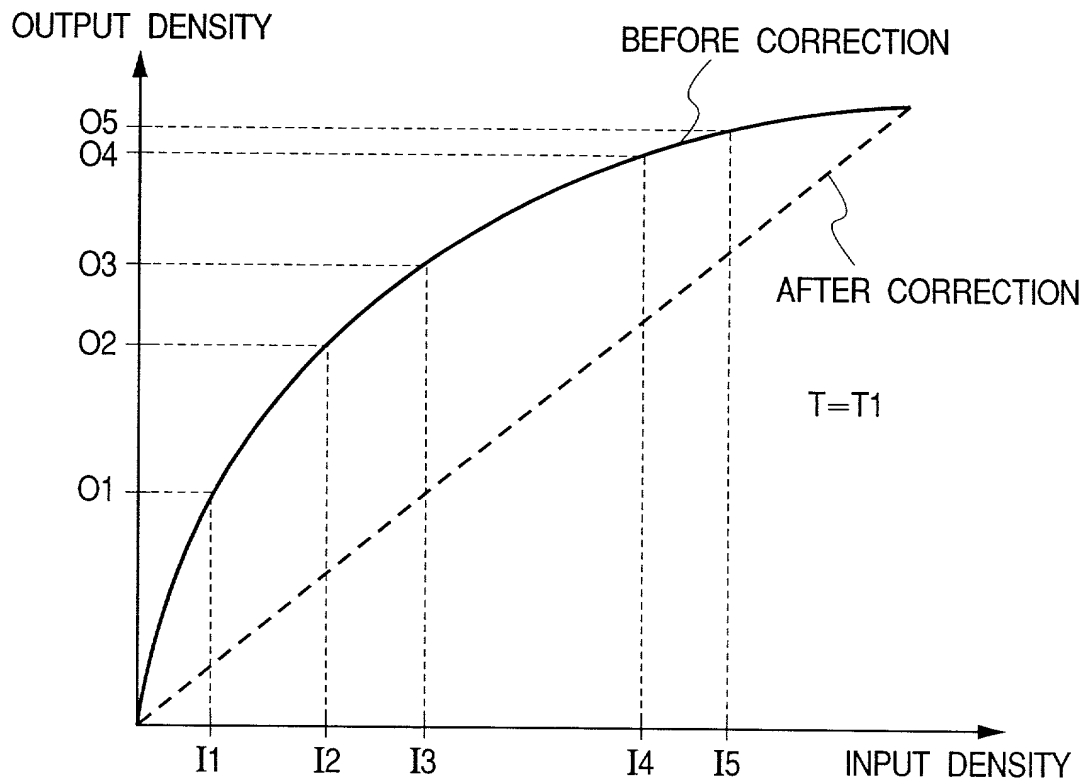
FIG. 8

FIG. 9

STORAGE MEDIUM SUCH AS FD/CD-ROM

DIRECTORY INFORMATION
1ST DATA PROCESSING PROGRAM PROGRAM CODES CORRESPONDING TO STEP OF FLOW CHART IN FIG. 2
2ND DATA PROCESSING PROGRAM PROGRAM CODES CORRESPONDING TO STEP OF FLOW CHART IN FIG. 3
3RD DATA PROCESSING PROGRAM PROGRAM CODES CORRESPONDING TO STEP OF FLOW CHART IN FIG. 4
4TH DATA PROCESSING PROGRAM PROGRAM CODES CORRESPONDING TO STEP OF FLOW CHART IN FIG. 5
5TH DATA PROCESSING PROGRAM PROGRAM CODES CORRESPONDING TO STEP OF FLOW CHART IN FIG. 6
6TH DATA PROCESSING PROGRAM PROGRAM CODES CORRESPONDING TO STEP OF FLOW CHART IN FIG. 7

MEMORY MAP OF STORAGE MEDIUM

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled PRINTER SERVER, METHOD FOR PROCESSING DATA, AND STORAGE MEDIUM, the specification of which ☒ is attached hereto ☐ was filed on _____ as United States Application No. or PCT International Application No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	9/327466	November 28, 1997	Yes

I hereby claim the benefit under 35 U.S.C. §120 of any United States application(s), or §365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TAKEYUKI NAGASHIMA

Inventor's signature _____

Date _____ Citizen/Subject of JAPAN

Residence 32-12-106, Tsurumaki 1-chome, Setagaya-ku, Tokyo, Japan